



Optical HDMI Module

*User's Manual
for the M1-203H-TR*



Manual Contents

Manual Contents	1-0
Welcome ! Product Description	1-1
System Requirements for Setup	1-2
Installation	1-3
Troubleshooting, Maintenance, Technical Support	1-6
Product Specifications	1-7
Warranty Information	1-8
Regulatory Statements	1-9

Pictorials

Figure 1 – Overall Connection of Optical HDMI Module	1-1
Figure 2 – Connection of HDMI cable between Tx box and media receiver	1-3
Figure 3 – Connection of HDMI cable between Rx box and display	1-3
Figure 4 – Connection of 2 duplex LC fiber cables	1-4
Figure 5 – Connection of AC/DC power adaptor	1-4
Figure 6 – Disconnection of HDMI cable	1-5

Welcome!

Congratulations on your purchase of the M1-203H-TR, Optical HDMI Extender. This manual contains information that will assist you in installing and operating the product.

Product Description

The M1-203H-TR module offers 1,000 meters extension of 1080p digital graphic data and multi-channel audio data over one fiber, directly connected between computers, Blurays or media receivers and displays. The transmitter, located in a media receiver and the receiver in a display are connected to each of them by a 1.0m HDMI copper cable. Between two boxes, the one (1) SC patch cord fiber enables to transmit the audio encrypted graphic data, HDMI as well as HDCP (High Definition Contents Protection) interface over the same fiber.

The Shipping Group of M1-203H-TR Optical HDMI Extender is;

- ❑ **Tx and Rx boxes:** One (1) Transmitter (Tx) Box and One (1) Receiver (Rx) Box.
- ❑ **HDMI copper cable:** 2 pcs x 1m HDMI copper cable.
- ❑ **Option:** 1 SC optical cable (single-mode glass fiber.)
- ❑ **AC/DC power adaptor:** Two (2) +5V units
- ❑ **User's Manual**

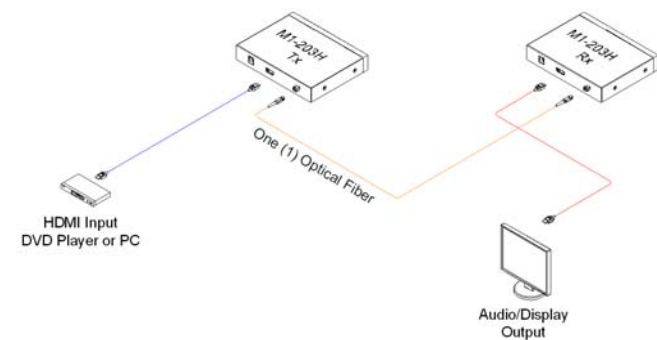


Figure 1 – Overall Connection of Optical HDMI Module

System Requirements for Setup

- **Hardware requirements**
 - Most of DVD, Bluray or media receiver with HDMI ports are compatible with the extender
 - In case of using computers as a graphic source, regardless of OS version, HDMI ports are required to be embedded.
 - Only HDMI TVs or monitors are applicable.
 - Proper initial trial of the entire platform with its application using a short length copper cable is recommended prior to install with the optical link.
- **Software requirements**
 - No special needs, but make sure that media contents protected by HDCP should be played with HDCP certified players and TVs.
- **AC/DC Power Adapter Technical Advisory**
 - The power of M1-203H-TR is designed to supply to both boxes of Tx and Rx by plugging the power plug to each power jack.
- **EDID Emulation Advisory**
 - Before use the product, the procedure of EDID emulation is needed as shown in the Installation (Step1 to 6)
 - We recommend you to try EDID emulation again if you want to change with another HDMI TV. It can be displayed without re-emulation between similar types of TVs.
- **Connection Advisory**
 - We recommend you to connect HDMI media source directly into HDMI display output via M1-203H-TR without connecting any distributor, switcher, selector etc, which could make incompatibility.

1-2 System Requirements for Setup

Installation

Important: Please use the installation procedure below. Improper, or no operation may result if the start-up sequence is not correctly followed.

Step 1

Carefully unpack the contents of the shipping group.

Before use the product, the procedure of EDID emulation is needed, as shown in the following from Step 1 to Step 6.

Step 2

With system power turned **off**, connect the upstream Transmitter box to the HDMI receptacle of a media receiver or a computer by one HDMI copper cable in the shipping group.

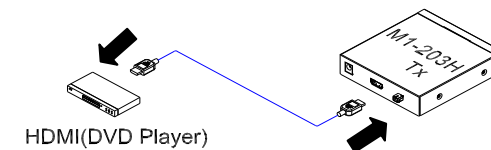


Figure 2 – Connection of HDMI cable between Transmitter box and media receiver

Step 3

In the same way as above, connect the Receiver box into the HDMI receptacle of the display by the other HDMI copper cable.

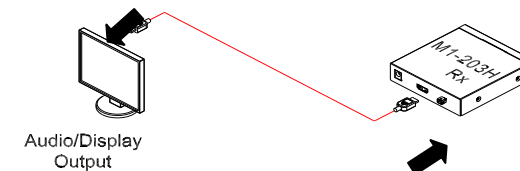


Figure 3 – Connection of HDMI cable between Receiver box and display

1-3 Installation

Notice: Please DO NOT look directly into the SC receptacles of the Transmitter box, while it is powered on, although this product is regulated strictly enough to operate under the Laser Class I, classified by CDRH/FDA for eye safety.

Step 4

Remove the module dust covers and connect SC optical fiber cable to SC receptacles of the Transmitter and Receiver boxes, as shown in Fig. 4. Ensure the SC connector is fully engaged.

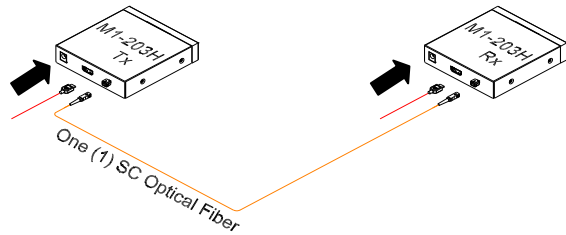


Figure 4 – Connection of 2 duplex LC fiber cables

Step 5

Connect an AC/DC power adapter to either of the Transmitter and Receiver boxes as your availability of AC outlets without turning on power or do not connect power adapter.

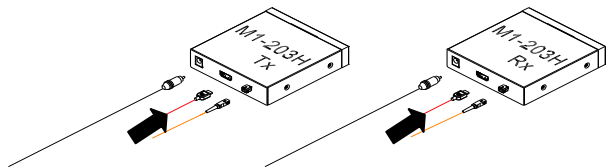


Figure 5 – Connection of AC/DC power adaptor

1-4 Installation (continued)

Step 6

Disconnect the HDMI cable of Transmitter box only as initially connect or change to other displays and turn on the power to emulate EDID of the TV to the transmitter box as shown in Fig. 6.


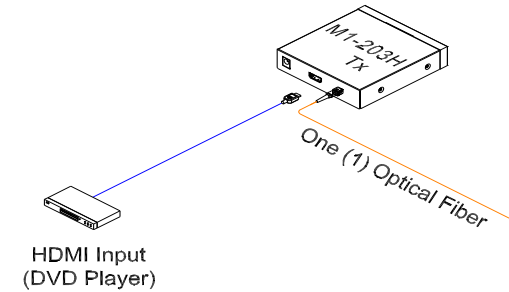


Figure 6 – Disconnection of HDMI cable

Check all front LEDs are On, then HDCP, Status LEDs are Off after 3 sec.

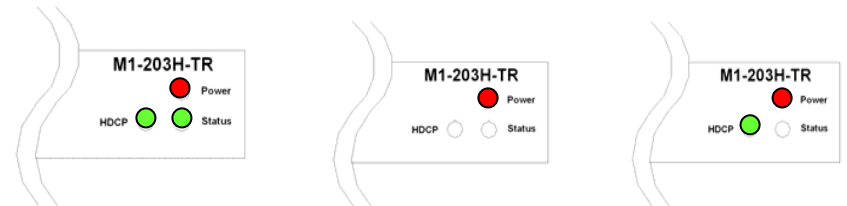

The HDCP LED fast flashes for 10 sec after 2 sec. (This can be repeated up to max. 3 times for normal emulation.)

All above procedures being finished, HDCP LED is flashed at 1 sec interval.

Step 7

Connect HDMI cable into receptacle of Transmitter box again.

Tip 1: After initial installation as guided in the above, we recommend you to power On and Off while all connections are set and the Tx/Rx boxes are powered in.

Tip 2: Avoid “hot plugging” the Tx or Rx boxes as this is not recommended practice with live digital voltages, even though no damage of the product might happen or repowering recovers all functions.

1-5 Installation (continued)

Troubleshooting

The display displays only black screen.

- Check that all AC and DC plugs and jacks used by external power supplies (both Opticis and others) are firmly connected.
- Ensure that power bars are live.
- Ensure that the Tx and Rx boxes plug correctly to the media receiver or computer and display, respectively.
- Check if the media receiver or computer and display are powered on and properly booted.
- Re-boot up the system after reconnecting the optical system cable.

Screen is distorted or displays noises.

- Check if the graphic resolution is properly set. Go to the display properties and tap the settings. Ensure that the resolution sets less than 1080p (1,920x1,080) at 60Hz refresh ratio.
- Reset the system.
- Power down, disconnect and reconnect the optical system cable or DC power adaptors, and power up.

Maintenance

No special maintenance is required for the optical system cables and power supplies. Ensure that the cables and power modules are stored or used in a benign environment free from liquid or dirt contamination.

There are no user serviceable parts. Refer all service and repair issues to Opticis or its authorized distributor.

Technical Support and Service

For commercial or general product support, contact your reseller. For technical service, contact Opticis by email techsupp@opticis.com or visit its website at www.opticis.com.

Product Specifications

M1-203H-TR Optical HDMI Extender

- **Compliance with HDMI standard:** supports HDMI 1.3a, using fiber-optic communication links and fully functions in HDCP.
- **Extension limit:**
Up to 1,000m (3,280feet) for 1080p at 60Hz over the single-mode fiber
- **Fiber-optic Connection:** The transmitter and receiver boxes of M1-203H-TR have SC fiber-optic connectors and should be used with Single-mode fiber or 9/125 μ m or 8/125 μ m
- **Initialization Time:** Less than 6 sec after connecting and playing when reconnect any power/HDMI/fiber optic cable of Tx/Rx while playing.
- **Audio Sampling Rate:** 48 kHz
Note: We recommend you to use with the above rate.
- **Mechanical specifications of Tx and Rx boxes**
 - **Dimensions:** 111.34mm / 31mm / 216mm (W/H/D)
 - **Weight:** 680 \pm 15 gr for each of Tx and Rx
- **Environmental Specifications**
 - Operating temperature: -10°C to 50°C
 - Storage temperature: -30°C to 85°C
 - Humidity: 5% to 95%

AC/DC Power Adapter

- **Power Input:** Universal AC 90-264V, 50/60Hz, AC power cord with power jack.
- **Power Output:** +5 V, 2.0 A SMPS DC-power Adapter
- **Cord DC Jack & length:** Core is 5 V and outer cylinder is GND. Length is 18.5 cm
- **AC Cord length:** 1.8m
- **Certification:** PSE, UL, cUL, FCC, CE, TUV-GS

Warranty Information

1 (One) Year Warranty

Opticis warrants this optical HDMI module to be free from defects in workmanship and materials, under normal use and service, for a period of one (1) year from the date of purchase from Opticis or its authorized resellers.

If a product does not work as warranted during the applicable warranty period, Opticis shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product.

All products that are replaced will become the property of Opticis.

Replacement products may be new or reconditioned.

Any replaced or repaired product or part has a ninety (90) day warranty or the remainder of the initial warranty period, whichever is longer.

Opticis shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to Opticis for repair under warranty or not.

Warranty Limitation and Exclusion

Opticis shall have no further obligation under the foregoing limited warranty if the product has been damaged due to abuse, misuse, neglect, accident, unusual physical or electrical stress, unauthorized modifications, tampering, alterations, or service other than by Opticis or its authorized agents, causes other than from ordinary use or failure to properly use the product in the application for which said product is intended.

Dispose of Old Electrical & Electronic Equipment

(Applicable in the European Union and other European countries with separate systems)



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

1-8 Warranty Information

FCC/CE Statement for regulation of Electro-magnetic emission

This device complies with part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 and 2 of FCC Rules, EN 55022/55024/61000-3 for CE certification. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction guide, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult a service representative for help.

Properly shielded and grounded cables and connectors must be used in order to comply with FCC/CE emission limits. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Certification for Safety

The extension system is certified pursuant to IEC60065 and its AC/DC power adapter is certified by UL1310, 1950, 60950 for North America, cUL or CSA for Canada, TUV-CE & GS for EU and PSE for Japan.

Certification of Eye Safety

This laser product is inside implemented by using 850nm VCSEL (Vertical Cavity Surface Emitting Laser) Transceivers, manufactured by Opticis Co., Ltd., which are all certified by CDRH/FDA referred in Accession Number 0210774 as classified in Laser Class 1.

1-9 Regulatory Statements

Opticis Locations

Headquarters

Opticis Co., Ltd.

#304, Byucksan Technopia, 434-6
Sangdaewon-Dong, Chungwon-Ku,
Sunnam City, Gyeonggi-Do, 462-716
South Korea

Tel: +82 (31) 737-8033~8

Fax: +82 (31) 737-8079

www.opticis.com

North American Office

Opticis USA LLC

649 Route 206
Unit 9 Suite 307
Hillsborough, NJ 08844

Tel: 908-837-9652

Fax: 908-837-9078

cdkim@opticis.com

For order support, please contact your Distributor or Reseller.

For technical support, check with the Opticis web site www.opticis.com or
contact techsupp@opticis.com