



Stretch DisplayPort over Optical Fibers, M1-5000

Description

The DisplayPort standard - which defined by VESA (Video Electronics Standard) - is an attractive alternative to digital display interface such as HDMI and DVI. Optical technology for this transmission stretches the performance beyond the limitations of copper wire with longer length, data security, negligible RFI/EMI and the elimination of costly analog distribution systems.

DisplayPort supports single-lane transfer rates as fast as 2.7Gbps across as many as four data pairs for a maximum of 10.8Gbps over a single cable. These features combine with support for color depth as great as 16 bits per color channel to give designers the option of improving image quality in applications that require screen resolution of as much as WQXGA (2560x1600), as well as increasing refresh rates to 120 Hz. The DisplayPort interface also carries embedded clock signals and provides a bidirectional auxiliary channel operating at 1 Mbps to enable link management and device control to comply with VESA's EDID (extended-display-identification) and MDCS (monitor-control-command-set) standards.

The M1-5000 consists of a transmitter and a receiver module, one side is connected by our creative multi channels optical connector and the other side is connected by short male DisplayPort copper cable. M1-5000 is fully compatible with DisplayPort 1.1.

Specification

- Supports DisplayPort 1.1 standards
- Offers total data rate 10.8Gbps (2.7Gbps per lane)
- Supports all VESA resolutions up to WQXGA (2560x1600), at 60Hz
- Hybrid cable with four multimode fibers cables for the DP interface and embedded copper wires to support the auxiliary channel, Hot Plug Detect and power management.
- Extends high resolution DP data up to 100 meters (328 feet) with auxiliary channel
- Compact end connector design easily allows direct connect to the HDTV source and display peripheral.
- No software to install; just plug and go.
- Data security with negligible RFI/EMI emissions.
- Certifications: CE / FCC, Class 1 Laser Eye Safety

Applications

- Conference Room, Auditoriums
- Medical
- Military, Aerospace
- Factory automation
- Traffic Control
- Stadiums

Stretch DisplayPort over Optical Fibers, M1-5000

Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units
Ambient Operating Temperature	T_A	0	25	+ 50	°C
Storage Temperature	T_s	-30		+ 70	°C
Storage Humidity	H_s	10		85	RH%

Electrical Power Supply Characteristics


($T_A = 0\text{ °C}$ to $+50\text{ °C}$, unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Units	
Supply Voltage	V_{CC}	4.5	5	5.5	V	
Supply Current	TX	I_{TCC}	-	120	200	Supply Current
	RX	I_{RCC}	-	350	400	
Power Dissipation	TX	P_{TX}	0.60	1.1	Power Dissipation	
	RX	P_{RX}	-	1.75		2.2

Ordering Information

Model number: M1-5000-xxx, where xxx = length in meters. Standard lengths are 10, 20, 30, 40, 50, 70 and 100m.

Dimension

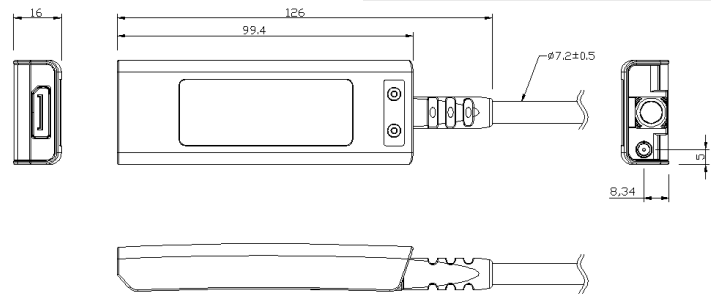

Compliance with International Standards

M1-5000 meets the requirements of North American FCC and European CE standards for RFI/EMI emissions, material ratings, and laser safety. Consult the product specification for further details.

Power

M1-5000 uses an external AC/DC adapter in the transmitter side to enable the supply of +5V to the transmitter and receiver modules.

Length

10, 20, 30, 40, 50, 70 and 100m are standard stock lengths. But other lengths up to 100m can be ordered..



Opticis Co., Ltd.
7F, 166, Jeongjail-ro, Bundang-gu
Sungnam-si, Gyunggi-do, 13558 South Korea
Tel: +82 (31) 719-8033
Fax: +82 (31) 719-8032

tosales@opticis.com



All contents are subject to be changed without prior notice.