


Stretch your digital connection beyond copper

Model: M5-1003

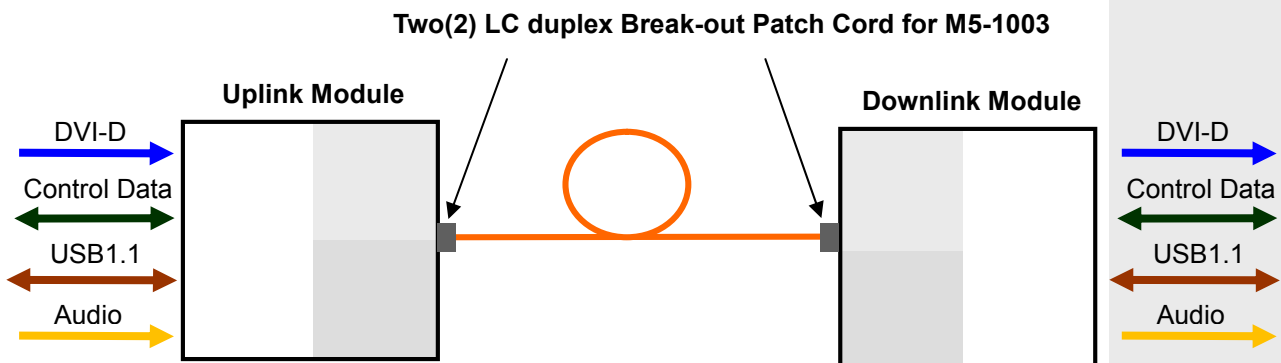

Descriptions

M5-1003 offers extremely long extension of DVI, USB, serial control data and audio up to 2 km over single-mode fiber cables with two (2) duplex LC connectors. It is tremendously long over the limits of copper extensions like a few of meter of DVI and USB.

Designed for high resolution performance, it guarantees lossless image quality and no frame dropping to deliver perfect graphic data transmission up to WUXGA (1,900x1,200) at 60Hz refresh rate. It is designed to multiplex and de-multiplex DVI, USB, RS232 and stereo audio so as to be linked over four (4) single-mode LC fibers at 1310nm/1550nm. It provides self EDID programming feature that makes the installation of M5-1003-TR more easy and flexible at any variable resolution.

Optionally, we could include convenient remote console switch and indicator for selecting local control or remote control.

Features and Specifications

- ◆ Extends DVI, USB, RS232 and Audio up to 2 km. optionally 10 km.
- ◆ Supports DVI up to resolution of 1,920X1,200, 24bit color and 60Hz refresh rate.
- ◆ Offers DVI and USB ports for Local Display and Keyboard/Mouse.
- ◆ Lossless Image Quality, with no Frame Dropping.
- ◆ Complies with USB1.1 (12Mbps).
- ◆ Provides Serial Control Data: RS232 through 9 pin D-sub connector.
- ◆ Supports one-directional analog stereo audio.
- ◆ Auto EDID features
- ◆ Interconnection between TX and RX module: two(2) duplex LC patch cords of single or multi mode fiber.
- ◆ Offers remote console switch and indicators.
- ◆ Rack mountable 1U half rack width metal enclosures.



Extend your Digital Connection!

Optical DVI/USB/RS232 Extender

Product Certification

EMI and Immunity

The Opticis M5-1003-TR extension modules have been tested and found to comply with the limits for class A device, pursuant to Part 15 of FCC-rules and EN 55022/55024/ 61000-3 for CE certification. These limits are designed to provide reasonable protection due normal use with other home network appliance.

Eye Safety

The Opticis M5-1003-TR extension module has been designed to meet Class 1 eye safety by adapting 1310nm/1550nm transmitter, certified by FDA/CDRH and IEC 60825-1.


Recommended Operating Conditions

| Parameter | Symbol | Min. | Typ. | Max. | Units |
|------------------|----------------|------|------|------|-------|
| Operating Temp. | T _A | 0 | 25 | + 50 | °C |
| Storage Temp. | T _s | -10 | | + 85 | °C |
| Storage Humidity | H _s | 5 | | 85 | RH% |

Specifications

| OPTICAL INTERCONNECTION | |
|---------------------------|--|
| Number | Four (4) fiber optic |
| Connectors | Four (4) LC connectors |
| Wavelength | 1310/1550 nm |
| Transmitter Power | -5 dBm, Typical |
| Receiver | 7 dB, Maximum |
| Operating Distance | Up to 2 km (6560 feet) 10 km (optionally) |
| VIDEO | |
| Supported Resolution | WUXGA (1900x1200) |
| Pixel data bit depth | 8 bits per channel, 3 channels (RGB) |
| Connectors (Tx) | One (1) female DVI-D for input One (1) female DVI-D for local monitor |
| Connector (Rx) | One (1) female DVI-D for output |
| USB | |
| Supported Standard | USB 1.1 |
| Data Rate | 12 Mbps |
| Connectors (Tx) | One (1) female USB-B for input Two (2) female USB-A for local KM |
| Connector (Rx) | Four (4) female USB-A for output |
| AUDIO | |
| Connector for Input | One (1) 3.5 mm stereo jack for Input in Tx |
| Connector for Output | One (1) 3.5 mm stereo jack for Output in Rx |
| Frequency Response | 20 Hz to 20 kHz, ± 0.5 dB |
| Input Impedance | >24 kohms |
| Output Impedance | < 1.0 ohm |
| SERIAL DATA COMMUNICATION | |
| Connector (Tx) | One (1) male 9-pin Dsub |
| Connector (Rx) | One (1) male 9-pin Dsub |
| Supported Protocol | RS-232C |

Typical Application

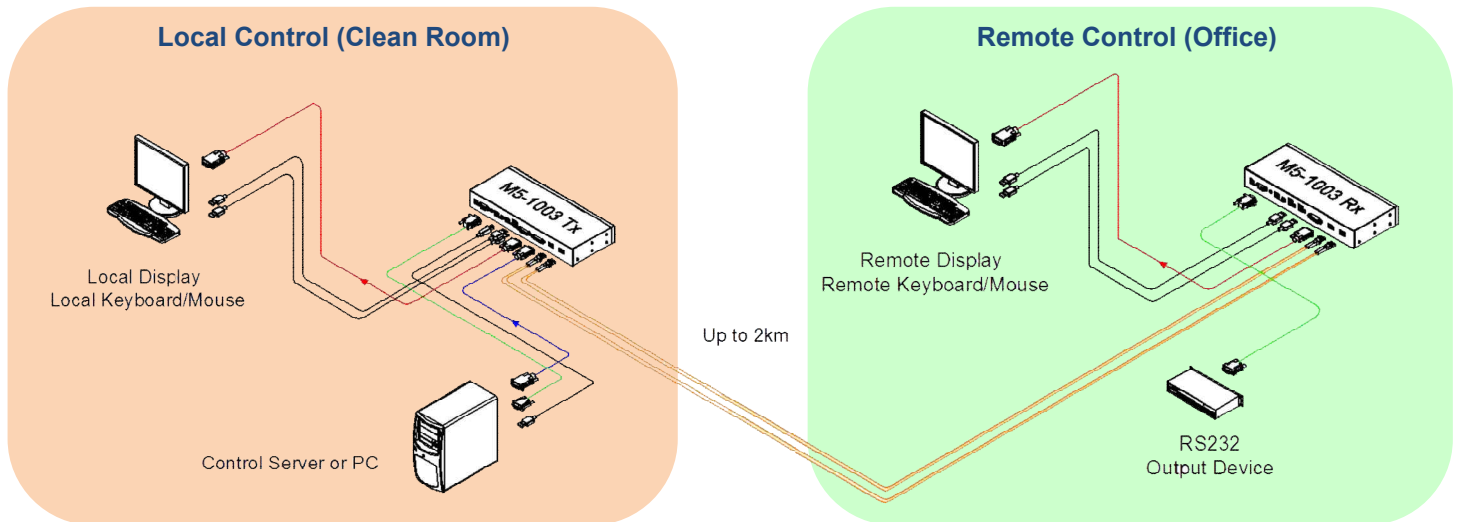

www.opticis.com

Headquarters
 Opticis Co., Ltd.
 # 304, Byucksan Technopia, 434-6
 Sangdaewon-Dong, Chungwon-Ku,
 Sungnam City, Kyungki-Do,
 462-716 South Korea
 Tel: +82 (31) 737-8033~8
 Fax: +82 (31) 707-8079
www.opticis.com

North American Office
 Opticis USA LLC

649 Route 206
 Unit 9 Suite 307
 Hillsborough, NJ 08844

Tel : 908-837-9652
 Fax: 908-837-9078

cdkim@opticis.com

All contents are subject to be changed without prior notice.