

DATA SHEET

DVI – USB Optical Extender

M5-1001

Contents

- ◆ Description
- ◆ Features
- ◆ Absolute Maximum Ratings
- ◆ Recommended Operating Conditions
- ◆ Electrical Power Supply Characteristics
- ◆ Optical and Electrical Characteristics
- ◆ Drawing of transmitter and receiver modules
- ◆ DVI Pin Description
- ◆ Reliability Test of Modules
- ◆ Terminology

Headquarters

Opticis Co., Ltd
501, Byucksan Technopia
434-6 Sangdaewon-Dong, Chungwon-Ku
Sungnam City, Kyungki-Do, 462-120
South Korea
Tel: +82 (31) 737-8033
Fax: +82 (31) 707-8079
Email: sales@opticis.com
www.opticis.com

North American Office

Opticis North America Inc.

330 Richmond Street, Suite 100, Chatham,
Ontario N7M 1P7
Canada

Tel: +1 (519) 355-0819
Fax: +1 (519) 355-0502

DVI - USB Optical Extender

Description

The reality of gigabit high-speed digital graphic interconnections mandates products that maintain front-of-screen video quality. Optical technology extends the ability to transmit digital graphic data beyond the physical limits of copper wires by, i) providing pure signal integrity over long distances for the optimum visual experience, ii) no EMI/RFI transmission or reception, iii) light weight, rugged cabling and connectors, iv) very cost effective per foot/metre, v) low power consumption, and vi) plug and go installation ease – no software requirements.

This product, named as M5-1001, gives 2km extension of DVI, USB, and RS232 over two strands of single mode glass of fiber. Fiber connection is duplex SC, much reliable in industry use. The DVI is complied with DDWG 1.0, supporting DDC2B standard in interconnection of EDID. The graphic resolution this M5-1001 supports is SXGA (1,280x1,024), 24 colour bits at 60Hz refresh rate. The USB follows High-speed USB, version 1.1 (12Mbps). This product takes in role of intermediate extension for RS232C interfaces of PC to PC or PC-to-devices.

The M5-1001 consists of an Uplink (or transmitter; Tx) and a Downlink (or receiver; Rx), connected by duplex SC terminated single mode glass of fiber between them, which offers electrical perfect isolation of PC and remote devices. The uplink has a DVI-I receptacle, a USB receptacle, and D-sub 9pin receptacle for RS-232C and the downlink has additionally 4 ports USB hub. Each link module is driven by +12V/3A DC power adaptor.

The shipping group is as follows;

- 1) One pair of the uplink and the downlink
- 2) Two +12V/3A power adaptors
- 3) User Manual

Feature

- ◆ Extends DVI, USB and RS232 together up to 2,000 meters (6,240 feet).
- ◆ Supports all VESA resolutions up to SXGA (1,280x1,024), 24 colour bits at 60Hz refresh rate with 1 pixel/clock mode.
- ◆ Supports the DDC2B in terms of DDC.
- ◆ Supports USB1.1 (12Mbps) and 1Mbps in maximum for serial interface of RS232.
- ◆ Uses duplex SC optical connections, reliable and simple to be plugged.
- ◆ Offers electrical perfect isolation between PC and devices by using two single mode glass-of-fibers.
- ◆ Prepares reset buttons on each links to set free from system hung-up.
- ◆ No software to install; just plug and go.
- ◆ Data security with negligible RFI/EMI emissions

Applications

- ◆ Digital display system integration for medical, military, aerospace, factory automation, and traffic control platforms.
- ◆ Digital FPD, PDP and projector installation in conference rooms, auditoriums and for kiosk systems
- ◆ LED signboards for large scale information display and stadiums

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	T_{stg}	- 30	+ 70	°C
Supply Voltage	V_{CC}	10	16	V
Transmitter Differential Input Voltage	V_d	-	1	V
Relative Humidity	RH	10	85	%
Lead Soldering Temperature & Time	-	-	-	260°C, 10 sec

Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Units
Ambient Operating Temperature	T_A	0		+ 50	°C
Data Output Load	R_{LD}		50		Ω
Power Supply Rejection (Note1)	PSR		50		mV _{p-p}
Supply Voltage	V_{CC}	+ 11.4	+ 12.0	+ 12.6	V

Note1. Tested with a 50mV_{p-p} sinusoidal signal in the frequency range from 500 Hz to 500 MHz on the V_{CC} supply with the recommended power supply filter in place. Typically less than a 0.25 dB change in sensitivity is experienced.

Electrical Power Supply Characteristics

($T_A = 0$ °C to +50 °C, unless otherwise noted)

Parameter	Symbol	Minimum	Typical	Maximum	Units	
Supply Voltage	V_{CC}	11.4	12	12.6	V	
Supply Current	TX	I_{TCC}	-	620	650	mA
	RX	I_{RCC}	-	620	650	mA
Power Dissipation	TX	P_{TX}	-	7.44	8.2	W
	RX	P_{RX}	-	7.44	8.2	W



Optical & Electrical Characteristics

(T_{op} = 25°C)

Parameters		Symbol	Condition	Unit	Min.	Typ.	Max.	Remark
Data Bit Rate	1310 Tx		PRBS 2 ²³ -1,NRZ	Mbps		1250		
	1550 Rx					155.52		
	1550 Tx		PRBS 2 ²³ -1,NRZ	Mbps		155.52		
	1310 Rx					1250		
Fiber Length 9μm core SMF			10 ⁻¹⁰ BER, 155Mbps /1.25Gbps	km	2			
TRANSMITTER								
Average Power Output		P _{OUT}	I _r =I _{BIAS} + I _{mod} /2	dBm	-11 -15	-9 -10	-7 -8	
Extinction Ratio		ER		dB	10			
Center Wavelength		c	CW, @ P _{OUT}	nm	1270 1500	1310 1550	1355 1600	@1.31 μm @1.55 μm
Spectral Width			RMS Width	nm			4.0	
RIN				dB/Hz			-120	
Optical Rise/Fall Time		t _r /t _f	20 – 80%	nsec			0.26 2.0	
RECEIVER								
Sensitivity (Average Input Power)		P _{IN,MIN}	PRBS 2 ²³ -1, 10 ⁻¹⁰ BER	dBm			-23 -19	155M Rx 1.25G Rx
Wavelength		1310 1550		nm	1260 1500	1310 1550	1360 1600	
Receiver Overload		P _{IN,MAX}		dBm	-3.0			
Signal Detect Threshold		P _D P _A		dBm		P _{IN,MIN} -3 P _{IN,MIN} -2		
Decreasing light input								
Increasing light input				dBm				
Signal Detect Hysteresis		P _A - P _D		dB	0.5			

Drawing of transmitter and receiver modules

Dimension (mm)

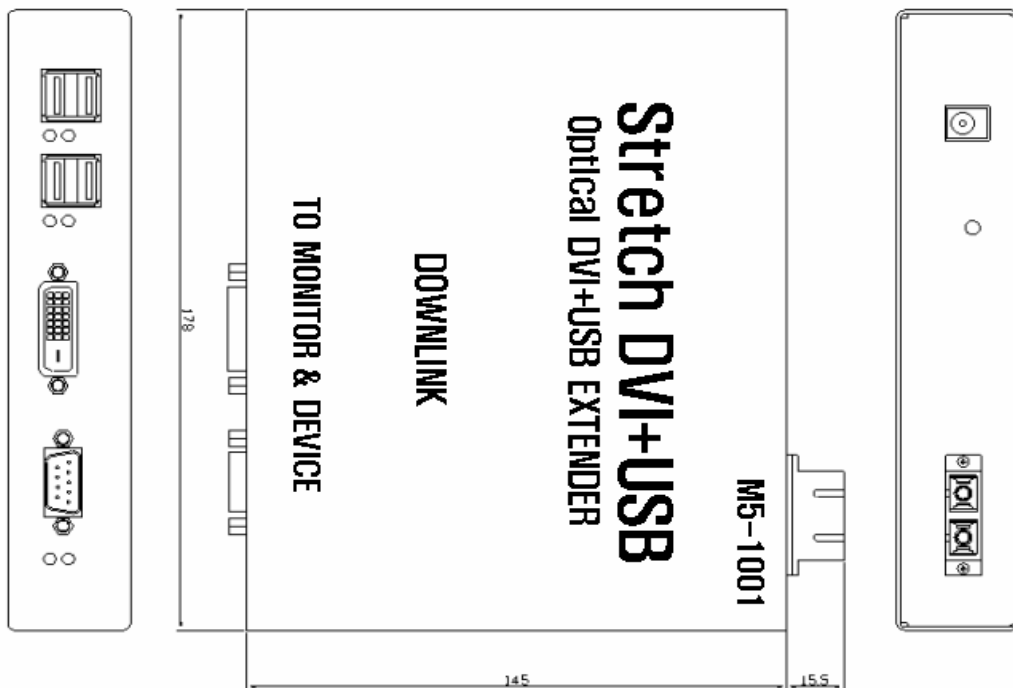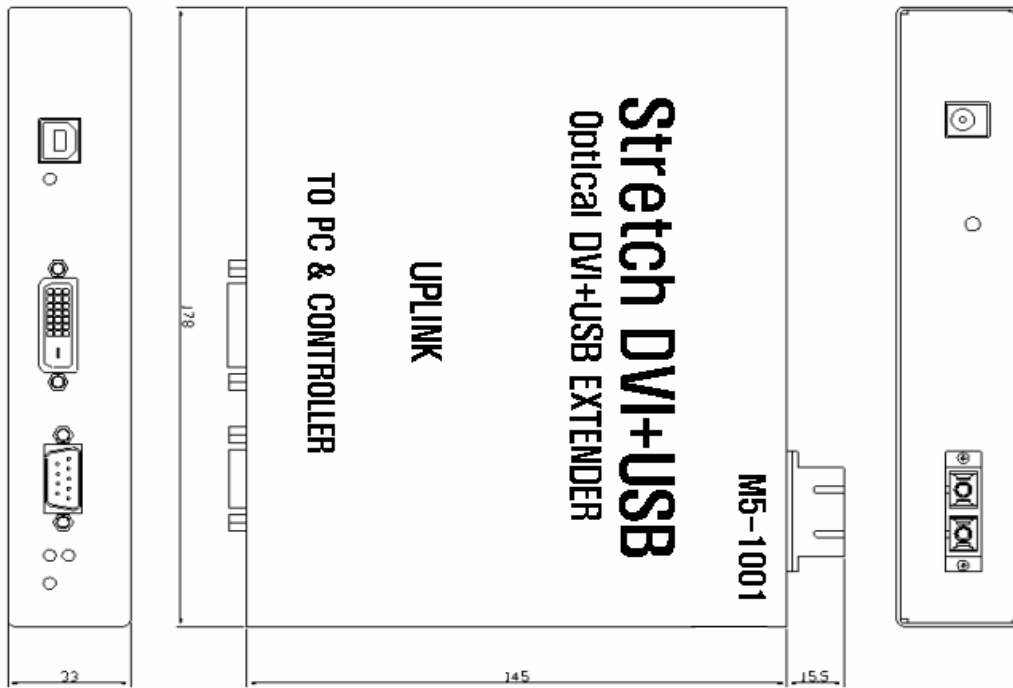

DVI Pin Description

Pin	Symbol	Functional Description
1	CH2-	TMDS Data Signal Channel 2 Negative
2	CH2+	TMDS Data Signal Channel 2 Positive
3	GND	TMDS Data Signal Channel 2 Shield
4		
5		
6	DDC Clock	DDC Clock line for DDC2B communication
7	DDC Data	DDC Data line for DDC2B communication
8	N.C.	
9	CH1-	TMDS Data Signal Channel 1 Negative
10	CH1+	TMDS Data Signal Channel 1 Positive
11	GND	TMDS Data Signal Channel 1 Shield
12		
13		
14	5 V	5 V Input for Transmitter from Host 5 V Output for Monitor from Receiver
15	GND	Ground
16	Hot plug Detect	Signal is driven by monitor to enable the system to identify the presence of a monitor
17	CH0-	TMDS Data Signal Channel 0 Negative
18	CH0+	TMDS Data Signal Channel 0 Positive
19	GND	TMDS Data Signal Channel 0 Shield
20		
21		
22	GND	TMDS Clock Signal Shield
23	CLK+	TMDS Clock Channel Positive
24	CLK-	TMDS Clock Channel Negative

Note: Channels 3, 4 and 5 dual-link data signal pins are not used

RS232C Pin Description

Pin	Symbol	Functional Description
1	Received Line Signal Detector	Connected with Pin4 & Pin6 in module
2	RD	Data Receive: Uplink \leftrightarrow Downlink
3	TD	Data Transmit: Uplink \leftrightarrow Downlink
4	Data Terminal Ready	Connected with Pin1 & Pin6 in module
5	GND	Signal Ground
6	Data Set Ready	Connected with Pin1 & Pin4 in module
7	Request To Send	Connected with Pin8 in module
8	Clear To Send	Connected with Pin7 in module
9	NC	

Connection tips:

- 1) Connection of PC-to-PC: Cross connection of pins 2 and 3 between two PCs.
- 2) Connection of PC-to-Device: Straight connection of pin 2:2 and pin 3:3

Reliability Test

Opticis utilizes three types of test criteria for a reduction of variability and a continuous improvement of the process by its FEMA (Failure Mode and Effective Analysis) program.

- 1) Mechanical test (vibration, shock)
- 2) Temperature & humidity tests
- 3) EMC test (*FCC class A and CE Verification*)

Mechanical and Temperature & Humidity Test Data

Heading	Test	Conditions	Duration	Sample Size	Failure	Remarks
Operating Test	Operating at each Temperature (See Note)	* 0 ~ 50 °C (Interval: 10 °C)	30 Min (Each Temperature)	n=3	0	Note: Visual Test on the Display
Storage Test	Low Temperature	* T _s = -30 °C	96 HR	n=3	0	1. TS: Storage Temperature
	High Temperature	* T _s = 70 °C	96 HR	n=3	0	2. RH: Relative Humidity
	High Humidity High Temperature	* T _s : 60 °C * RH: 90%	96 HR	n=3	0	
Mechanical Test	Mechanical Shock	* Pulse: 11 ms * Peak level: 30 g * Shock pulse: 3 times/Axis	-	n=2	0	
	Mechanical Vibration	* Peak acceleration: 20 g * Frequency: 20~2000 Hz * Sweep time: 30 Minutes * 4 Times/Axis	-	n=2	0	

EMC Test Data

1) EMI: Meet FCC class A (ICES-003) and CE class A

STANDARDS		CONDITIONS
EN 55 022 (CISPR22) FCC; PART 15 SUBPART B	CE (Conducted Emission) & RE (Radiated Emission)	Meet Class A
EN 61000-3-2 (IEC 61000-3-2)	Harmonics	Meet Class A
EN 61000-3-3 (IEC 61000-3-3)	Flickers	Meet Class A

2) EMS: Meet CE standards (EN 55024) and CISPR24 equivalents

STANDARDS		CONDITIONS
EN 61 000-4-2:1995	Electrostatic Discharge Immunity (Air: 8kv, Contact: 4kv)	Meet Criterion A
EN 61 000-4-3:1996	Radiated RF E-Field (80~1000 MHz) 3V/m (AM 80%, 1kHz)	Meet Criterion A
EN 61 000-4-4:1995	Fast Transients (5kHz, 60Seconds)	Meet Criterion A
EN 61 000-4-5:1995	Surge Transients	Meet Criterion A
EN 61 000-4-6:1996	Conducted Susceptibility (CS) Radiated Susceptibility (RS)	Meet Criterion A
EN 61 000-4-11:1994	Voltage Dips, Interruption & Variation	Meet Criterion A and C